


NOR810®

NORSOUND BY NORSEAL

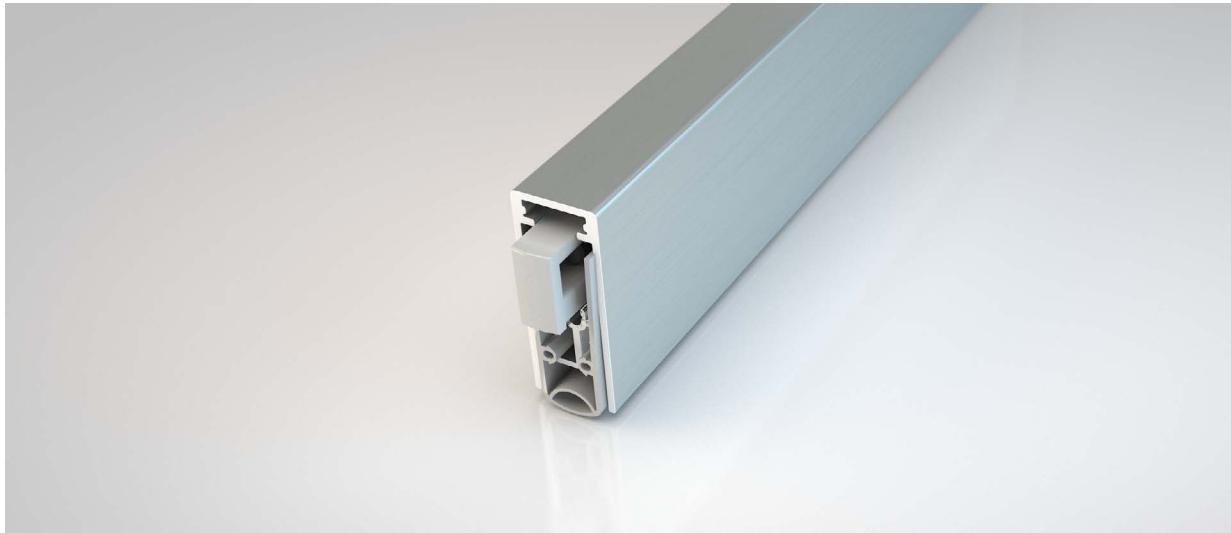

Application

Bottom edge of acoustic timber doorsets

Fixing

Rebated, held in place with end caps

Performance

Suitable for use on most fire doors
Compliant with BS 476-22
UL Approval
Smoke tested in accordance with BS 476-31.1
Acoustically tested in accordance with
BS EN ISO 10140-2
Certifire CF629
1,000,000 cycle tested
Self levelling

Material

Aluminium, Silicone gasket

Standard lengths (mm)

320, 435, 535, 635, 735, 835, 935, 1035, 1135, 1235,
1335, 1435, 1535

Minimum / Maximum length (mm)

320 / 1700

Gap coverage (mm)

20

Actuation

Single

Cutback (mm)

Various, >100, 320 limited to 85


Colour

Mill finish, Grey gasket

Order codes

NOR810 + Length eg. **NOR810320** (320mm)

Dimensions



 5 Regents Drive
Prudhoe
Northumberland
NE42 6PX

 norseal.co.uk

 sales@norseal.co.uk

 01661 830088

Registered in Companies House Cardiff No. 04317595 VAT Reg. No. 733 9466 08